

Product Name	Universal Thermal Delivery System	Quantity		Item #	
--------------	-----------------------------------	----------	--	--------	--



Standard bag color: Black

NOTE: CookTek® Universal Thermal Delivery Systems bags and chargers are not compatible with CookTek® Pizza Thermal Delivery System chargers, FlashPak™ discs, or VaporVent™ bags.



Standard Features

- Portable table top design with powder coated steel, heavy duty electronic components, and high impact polycarbonate locator
- Microprocessor monitors vital components multiple times per second to check for overheating, power supply problems and more. Charger shuts off and indicates error codes enabling user to diagnose and correct minor problems
- Initial charge in 5 minutes or less
- Recharge in 90 seconds (avg.)
- Lightweight pellet and bag at 7.45 lb / 3.4 kg
- Extremely easy to implement with no delivery bag cord, no maintenance, and no extra labor steps
- Charger housing manufactured and designed to operate on a standard countertop or “dropped-in” to a custom shelving unit
- Charger does not produce any heat on locator surface
- User friendly membrane panel and lighted displays are easy to operate and understand
- Charger manufactured and designed to handle exposure to flour, dust, oil, grease, and various other food substances found in food establishments
- Automatic load detection allows for instant energy transmission to bag, and almost no energy consumption when bag is not present
- Automatic shut-off feature prohibits overheating
- Easy to clean polycarbonate surface
- Integral cooling fan keeps internal electronics cool

- Available in 208-240VAC
- One year limited warranty
- Made in the USA

Specifications

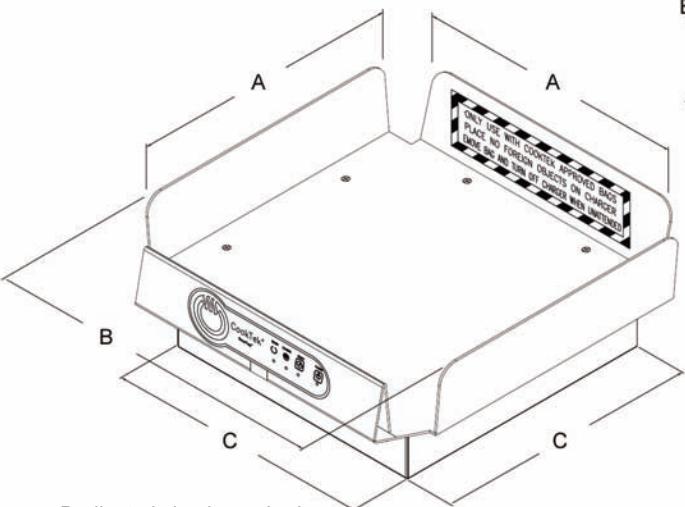
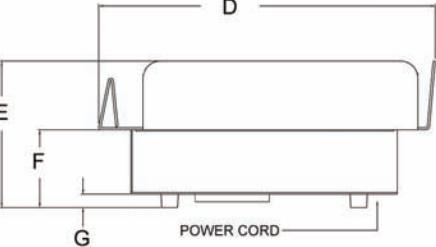
Shall be a CookTek induction Universal Thermal Delivery System, model _____ with a total kW rating of _____.

Unit shall be manufactured in the United States and constructed of powder coated steel with a polycarbonate locator tray.

Unit shall be equipped with microprocessor that performs precise temperature control, auto shut-off to prevent overheating, self-diagnostics to ensure consistent heating of induction-compatible loads.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).

NOTE: Universal Thermal Delivery System must be used in conjunction with CookTek® approved UTDS bags and UTDSII FlashPak™ discs.

		Dimensions	
		inches	mm
A	16.25	412	
B	20.19	512	
C	15.50	393	
D	21.63	549	
E	8.55	217	
F	4.55	115	
G	1.00	25	

- Dedicated circuit required
- Requires maximum (do not exceed) ambient temperature of 50°C/122°F
- Cooling clearance: 2" (55mm) for front, sides, and rear, 6" (152mm) below when mounted in custom shelving unit





Specifications

Model Number	UTDSII200
Power Requirements	208-240VAC, 1 Ph
Power Consumption	1400W (max)
Voltage	208-240VAC, 50/60 Hz
Amperage	7.5A (max)
Power Range	1200-1400W
Base Dimensions (in)	15.5" x 15.5" x 4.55"
Base Dimensions (mm)	393 x 393 x 115
Dimensions w/bag locator (in)	21.63" x 20.19" x 8.55"
Dimensions w/bag locator(mm)	549 x 512 x 217
Weight	19 lbs / 8.6 kg
Packaged Weight	23.3 lbs / 10.6 kg
Packaged Dimensions (in)	24" x 23" x 13"
Packaged Dimensions (mm)	609 x 584 x 330
Power Cord Length	6 ft / 1.8 m
Plug Type	Country Specific
Warranty	12 months limited parts and labor on charger only

Note: Ambient air should not exceed 50°C/122°F. Dedicated circuit required. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

CookTek, LLC 156 N. Jefferson St. Ste 300 Chicago, IL 60661-1436, USA www.cooktek.com	Tel: 1.312.563.9600 Fax: 1.312.432.6220 Toll Free: 1.888.COOKTEK (266.5835) Toll Free Fax: 1.888.COOKFAX (266.5329)
--	---