

PRO DUCT:	Q TY:	ITEM #:
<div>  <div> <div>US</div> <div>entela®</div> <div>Certified</div> </div> <div> <div>NSF</div> <div>CE</div> </div> </div>		
<div> <div> <div>Standard Features:</div> <ul style="list-style-type: none"> • Drop-in countertop design with stainless steel top, aluminum housing and control box, heavy duty electronic components, and specially engineered, high-impact, high-temperature, recessed glass wok bowl designed for use in commercial kitchens • Induction coil surrounds glass bowl to allow for maximum heating of induction compatible wok pans • Control knob for ease of use and automatic power or temperature control • SmarTemp™ Temperature allows for 20 power cook settings • Pan Maximizer feature achieves maximum heating rate of induction compatible wok pan • Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Cooktop shuts off and displays error codes enabling user to diagnose and fix minor problems • LED display for precise user feedback • Automatic pan detection allows for instant energy transmission to pan, and no energy use when pan is not present • Automatic shut-off feature prohibits overheating • Drop-in cooktops and control boxes engineered and designed for easy installation • Easy-to-clean glass bowl • Integral cooling fan keeps internal electronics cool • Available in 1800 Watts (100-120V), 2500, 3000 and 3500 Watts (200-240V) • One year limited warranty • Made in the USA </div> <div> <div>Specifications:</div> <p>Shall be a CookTek drop-in induction wok, Model _____ with a total kW rating of _____. Unit shall be manufactured in the United States and constructed of a stainless steel housing, aluminum control box, and a specially engineered, high-impact, high-temperature, recessed glass wok bowl. Unit shall be equipped with a built-in SmarTemp™ microprocessor that performs auto shut-off to prevent over-heating, self-diagnostics, and a pan maximizer feature that ensures maximum heating of induction compatible wok pan. Unit shall have LED display for precise user feedback. Unit shall have adjustable knob control with 20 power cook settings. Unit shall operate on _____ volts _____ amps.</p> </div> </div>		
<div> <div>  <div>  <div>MADE IN THE USA</div> </div> </div> <div> <div>  <div> <div>CookTek®</div> <div>MagnaWave™ Systems</div> </div> </div> </div> </div>		


DROP-IN INDUCTION WOK

MWDG-1800, MWDG-2500, MWDG-3000, MWDG-3500



DROP-IN INDUCTION WOK

MWDG-1800, MWDG-2500, MWDG-3000, MWDG-3500

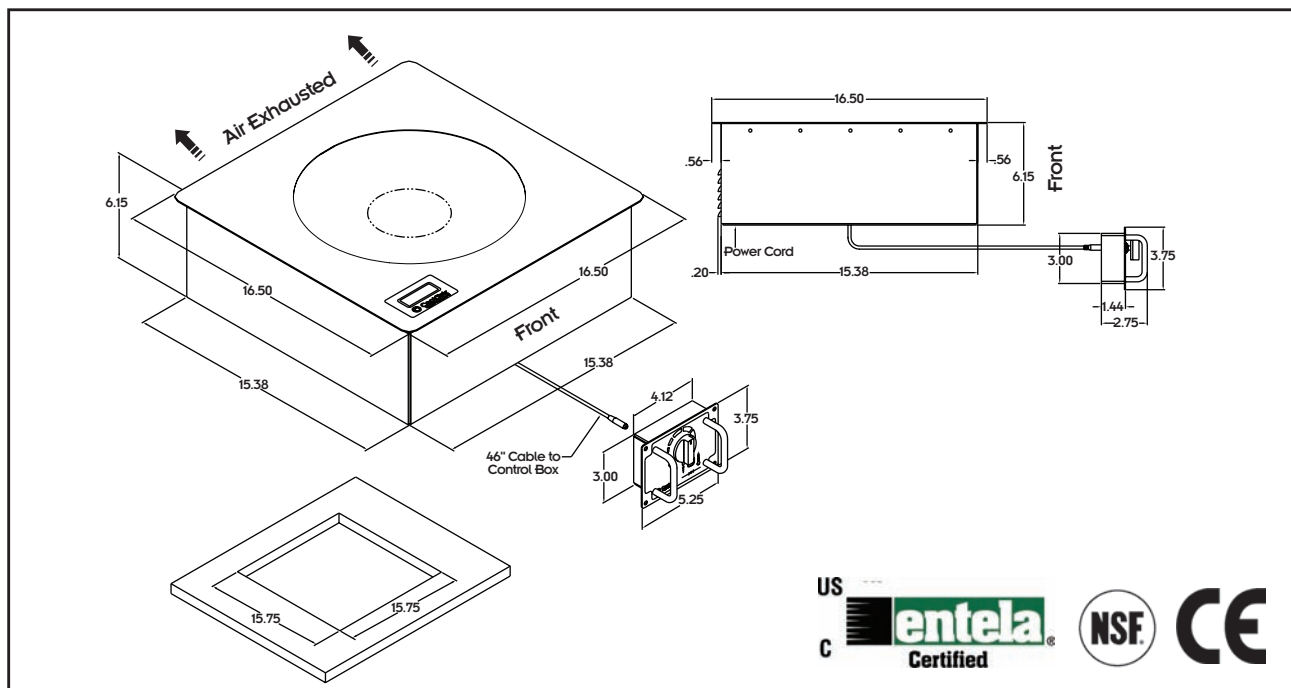

SPECIFICATIONS

Model Number	MWDG-1800	MWDG-2500	MWDG-3000	MWDG-3500
Power requirements	100-120V, 1PH	200-240V, 1PH	200-240V, 1PH	200-240V, 1PH
Power consumption	1800 Watts	2500 Watts	3000 Watts	3500 Watts
BTU comparison	16,000 BTU	22,000 BTU	26,000 BTU	31,000 BTU
Voltage	100-120V, 50/60Hz	200-240V 50/60Hz	200-240V 50/60Hz	200-240V 50/60Hz
Amperage	15 amps (at max. setting)	11 amps (at max. setting)	13 amps (at max. setting)	15 amps (at max setting)
Power range	100-1800W	100-2500W	100-3000W	100 - 3500W
Temperature range	85 - 500F	85 - 500F	85 - 500F	85 - 500F
Surface dimensions (inches)	16.50L x 16.50W x 6.15H	16.50L x 16.50W x 6.15H	16.50L x 16.50W x 6.15H	16.50L x 16.50W x 6.15H
Weight	21.5 lbs	21.5 lbs	21.5 lbs	21.5 lbs
Packaged weight	23 lbs	23 lbs	23 lbs	23 lb
Packaging dimensions (inches)	20.0L x 20.0W x 14.0H	19.0L x 19.0W x 14.5H	19.0L x 19.0W x 14.5H	20.0L x 20.0W x 14.0H
North American Cord length & plug	6Ft., NEMA 5-15P	6Ft., NEMA 6-20P	6Ft., NEMA 6-20P	6Ft., NEMA 6-20P
Control box lead length	40 inches	40 inches	40 inches	40 inches
Warranty	One year limited warranty	One year limited warranty	One year limited warranty	One year limited warranty
Cooling clearance	2" for front, sides and rear 9" from bottom	2" for front, sides and rear 9" from bottom	2" for front, sides and rear 9" from bottom	2" for front, sides and rear 9" from bottom

Note: Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. It's CookTek's policy to continually improve its products, and we reserve the right to change or improve our specifications without notification.

CookTek
810 West Washington Blvd.
Chicago, Illinois 60607 USA
www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220
Toll Free: 1.888.COOKTEK (266-5835)
Toll Free Fax: 1.888.COOKFAX (266-5329)



DROP-IN INDUCTION WOK

MWDG-1800, MWDG-2500, MWDG-3000, MWDG-3500