

Product Name	Apogee Drop-In Buffet/Wok	Quantity		Item #	
--------------	---------------------------	----------	--	--------	--



Note: Induction cooking requires the use of induction compatible (i.e. magnetic) pots and pans.



Standard Features

- Drop-in housing, heavy duty electronic components, and specially engineered, high-impact, high-temperature recessed glass wok bowl designed for use in commercial kitchens
- Pan Maximizer feature and an induction coil that surrounds glass bowl allow for maximum heating of induction compatible wok pans
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Wok unit shuts off and displays error codes enabling user to diagnose and correct minor problems
- LCD display panel with capacitive touch for precise user feedback and operation
- Built-in cooking timer
- Automatic pan detection allows for instant energy transmission to pan, and no almost energy consumption when pan is not present
- Automatic shut-off feature prohibits overheating
- Easy to clean glass top and front surface
- Fits in same cut-out as Apogee Drop-In Induction CookTop and Apogee Drop-In Buffet/CookTop Combo
- Integral cooling fan keeps internal electronics cool
- Available in 2500, 3000, and 3500 watts (200-240VAC)

- 14" stainless steel induction compatible wok pan available as an accessory
- One year limited warranty
- Made in the USA


Specifications

Shall be a CookTek drop-in induction buffet/wok, model _____ with a total kW rating of _____.

Unit shall be manufactured in the United States and constructed of a stainless steel housing with a specially engineered, high-impact, high-temperature recessed glass wok bowl to accommodate wok pans.

Unit shall be equipped with 100 precise power settings, auto shut-off to prevent overheating, self-diagnostics, and a pan maximizer feature that ensures maximum heating of any induction compatible wok pan.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).

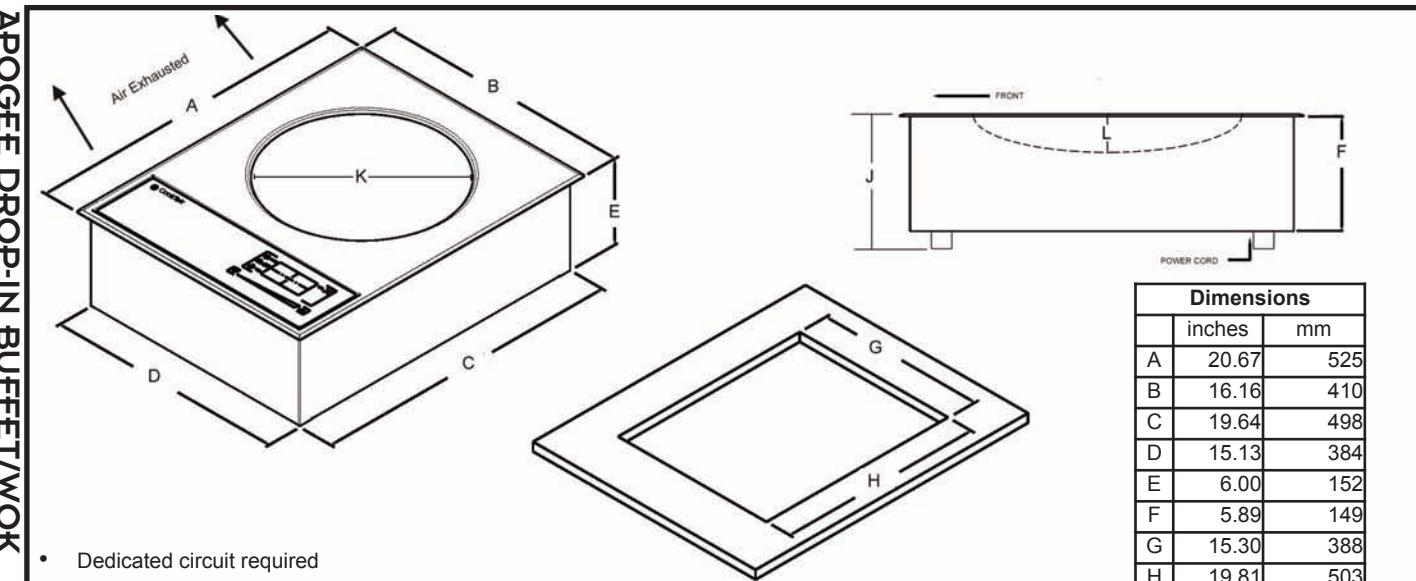

- Dedicated circuit required
- Requires 70 CFM (2.0m³/min) free air flow with adequate enclosure venting and maximum (do not exceed) ambient temperature of 50°C/122°F
- Cooling clearance: 2" (55mm) for front, sides, and rear, 6" (152mm) below



Dimensions		
	inches	mm
A	20.67	525
B	16.16	410
C	19.64	498
D	15.13	384
E	6.00	152
F	5.89	149
G	15.30	388
H	19.81	503
J	6.89	175
K	11.75	298
L	2.00	50

Specifications

Model Number	MBW2500G	MBW3000G	MBW3500G
Power Requirements	200-240VAC, 1Ph	200-240VAC, 1Ph	200-240VAC, 1Ph
Power Consumption	2500W (max)	3000W (max)	3500W (max)
BTU Comparison	22,000 BTU	26,000 BTU	31,000 BTU
Voltage	200-240VAC, 50/60 Hz	200-240VAC, 50/60 Hz	200-240VAC, 50/60 Hz
Amperage	12A (max)	14A (max)	16A (max)
Power Range	100-2500W	100-3000W	100-3500W
Temperature Range	85-500°F / 30-260°C	85-500°F / 30-260°C	85-500°F / 30-260°C
Dimensions (in)	20.67" x 16.16" x 6"	20.67" x 16.16" x 6"	20.67" x 16.16" x 6"
Dimensions (mm)	525 x 410 x 152	525 x 410 x 152	525 x 410 x 152
Cutout Dimensions (in)	15.30" x 19.81"	15.30" x 19.81"	15.30" x 19.81"
Cutout Dimensions (mm)	388 x 503	388 x 503	388 x 503
Weight	20 lbs / 9.1 kg	20 lbs / 9.1 kg	20 lbs / 9.1 kg
Packaged Weight	23 lbs / 10.4 kg	23 lbs / 10.4 kg	23 lbs / 10.4 kg
Packaged Dimensions (in)	24" x 18" x 10"	24" x 18" x 10"	24" x 18" x 10"
Packaged Dimensions (mm)	609 x 457 x 254	609 x 457 x 254	609 x 457 x 254
Power Cord Length	6 ft / 1.8 m	6 ft / 1.8 m	6 ft / 1.8 m
Plug Type	Country Specific	Country Specific	Country Specific
Remote Control Box Cord Length	6 ft / 1.8 m	6 ft / 1.8 m	6 ft / 1.8 m
Warranty	12 months limited parts and labor		

Note: Ambient air should not exceed 50°C/122°F. Dedicated circuit required. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.