




APOGEE FREESTANDING DOUBLE HOB COOKTOPS
MC-2502FG, MC-2502SG

PRODUCT:	QTY:	ITEM #:
<p>Standard Features:</p> <ul style="list-style-type: none">Portable tabletop design with stainless steel housing, heavy duty electronic components, and high impact, thick, ceramic-glass top engineered for use in commercial kitchensAvailable in front-to-back or side-by-side modelsEach induction hob has its own separate controls for independent operation and functionalityPan Maximizer feature achieves maximum heating of any induction compatible panMicroprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Cooktop shuts off and displays error codes enabling user to diagnose and fix minor problemsLCD display panel with capacitive touch for precise user feedback and operationBuilt in cooking timerSmarTemp™ temperature control allows for 100 power cook and temperature settingsAutomatic pan detection allows for instant energy transmission to pan, and no energy use when pan is not presentAutomatic shut-off feature prohibits overheatingSloped front panel allows for easy viewing and operationEasy-to-clean glass top and front surfaceIntegral cooling fan keeps internal electronics coolAvailable in 5000 Watts total (200-240V)–2500 Watts per hobOne year limited warrantyMade-in-the-USA		<p>Specifications:</p> <p>Shall be a CookTek free-standing double hob cooktop, Model _____ with a total kW rating of _____. Unit shall be manufactured in the United States and constructed of a stainless steel housing and a high impact, thick, ceramic-glass top. Unit shall be equipped with built in SmarTemp™ temperature control with 100 precise power and temperature settings, auto shut off to prevent over-heating, self diagnostics, and a pan maximizer feature that ensures maximum heating of any induction compatible pan. Unit shall have LCD display panel with capacitive touch for precise user feedback. Unit shall operate on _____ power with integral cord and plug supplied.</p>
		MADE IN THE USA

APOGEE FREESTANDING DOUBLE HOB COOKTOPS

MC-2502FG, MC-2502SG

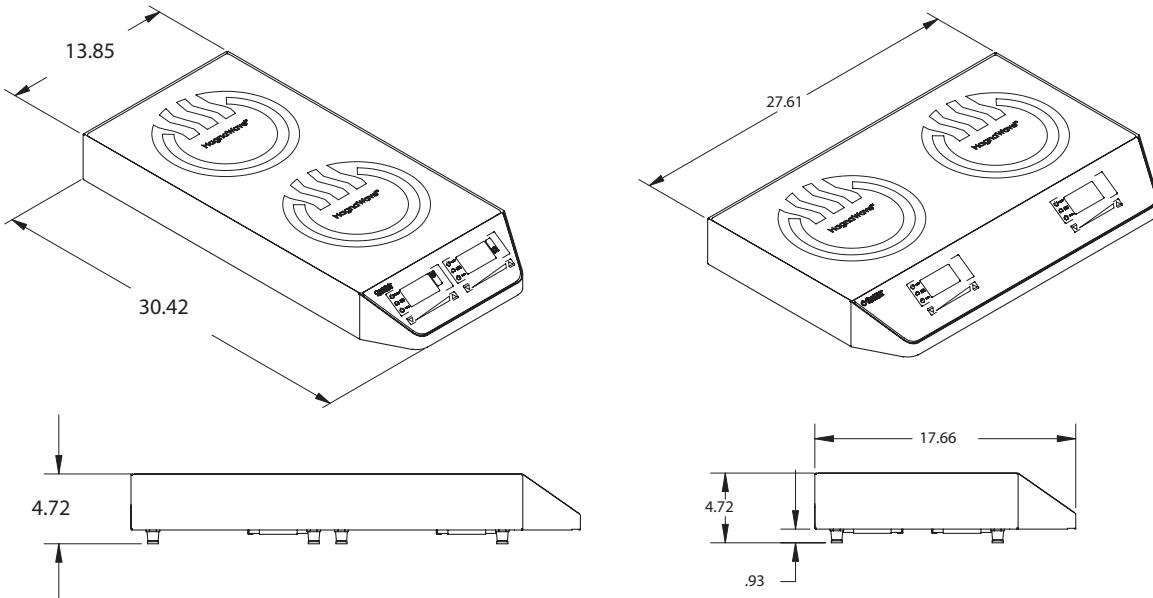

SPECIFICATIONS

Model Number	MC-2502FG	MC-2502SG
Power requirements	200-240V, 1PH	200-240V, 1PH
Power consumption	5000 Watts (2 x 2500W at max setting)	5000 Watts (2 x 2500W at max setting)
BTU comparison	2 x 28,000 BTU	2 x 28,000 BTU
Voltage	200-240V 50/60Hz	200-240V 50/60Hz
Amperage	24 amps (at max setting)	24 amps (at max setting)
Power range	100 - 2500W per hob	100 - 2500W per hob
Temperature range	85 - 500F 30 - 260C	85 - 500F 30 - 260C
Dimensions (inches) (cm)	30.42L x 13.85W x 4.72H 69.85L x 35.08W x 11.40H	17.31L x 27.16W x 4.72H 43.77L x 70.13W x 11.99H
Weight	32.1 lbs	33.5 lbs
Packaged weight	45 lbs	45 lbs
North American Cord length & plug	6 Ft., NEMA 6-30P	6 Ft., NEMA 6-30P
Warranty	One year limited warranty	One year limited warranty
Cooling clearance	2" (5.1cm) for front, sides and rear	2" (5.1cm) for front, sides and rear

Note: Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. It's CookTek's policy to continually improve its products, and we reserve the right to change or improve our specifications without notification.