




BUFFET SYSTEM / COOKTOP
MBC-1800G, MBC-2500G, MBC-3000G, MBC-3500G

BUFFET SYSTEM / COOKTOP

MBC-1800G, MBC-2500G, MBC-3000G, MBC-3500G

PRODUCT:	QTY:	ITEM #:
Standard Features:	Specifications:	
<ul style="list-style-type: none">Drop-in countertop design with stainless steel edging, stainless housing, heavy duty electronic components, and high impact, thick, ceramic-glass cook top engineered for commercial use.SmarTag™ Temperature control allows for over 100 precise temperature settings in conjunction with SmarTag™ chafing dishSmarTemp™ temperature control mode made available for induction-compatible chafing dishes even without SmarTag™ technologyPan Maximizer feature achieves maximum warming of any induction compatible panMicroprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Cooktop shuts off and displays error codes enabling user to diagnose and fix minor problems.RFID monitors food holding temperature in Smar Tag™ chafing dishesUnit also includes SmartTemp and Power Cook ModeLCD display for precise user feedback of set temperature and actual temperatureAutomatic pan detection allows for instant energy transmission to panAutomatic shutoff feature prohibits overheatingGlass panel allows for easy viewing and operationEasy-to-clean glass top and front surfaceIntegral cooling fan keeps internal electronics coolFits in same cutout as Buffet Wok and Standard Buffet unit.Available in 1800 watts, 120V; 2500, 3000, 3500 watts, 240VOne year limited warrantyMade in the USA		
		MADE IN THE USA

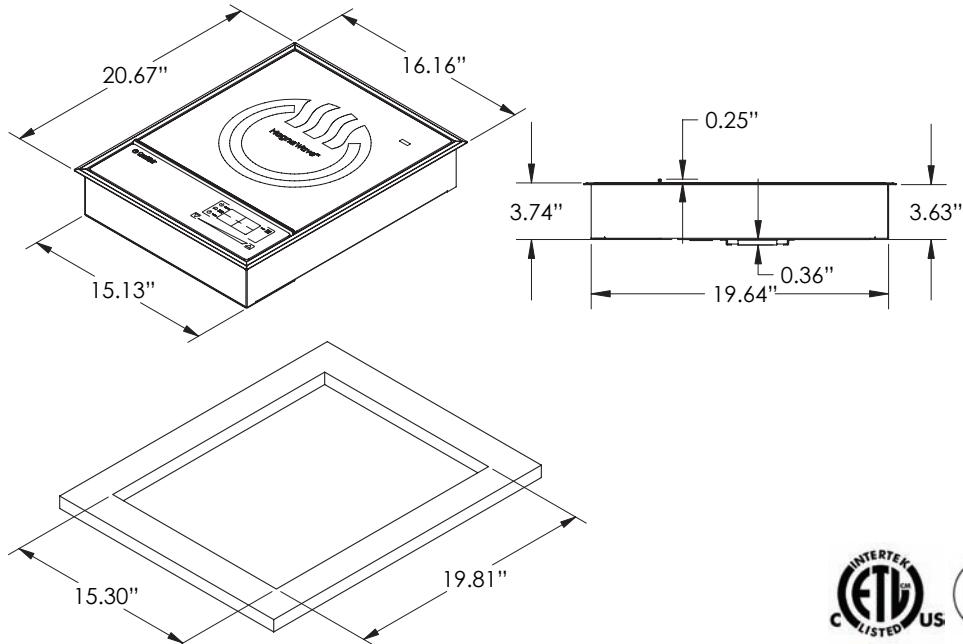


SPECIFICATIONS

Model Number	MBC-1800G	MBC-2500G	MBC-3000G	MBC-3500G
Power requirements	100 -120V, 1PH	200 -240V, 1PH	200 - 240V, 1PH	200 - 240V, 1PH
Power consumption	1800 Watts (at max. setting)	2500 Watts (at max. setting)	3000 Watts (at max. setting)	3500 Watts (at max. setting)
BTU comparison	16,000 BTU	22,000 BTU	26,000 BTU	31,000 BTU
Voltage	100 -120V 50/60Hz	200 - 400V 50/60Hz	200 - 240V 50/60Hz	200 - 240V 50/60Hz
Amperage	15 amps (at max. setting)	12 amps (at max. setting)	14 amps (at max. setting)	16 amps (at max. setting)
Power range	100 -1800W	100 - 2500W	100 - 3000W	100 - 3500W
Temperature range	85 - 500F	85 - 500F	85 - 500F	85 - 500F
Dimensions (inches)	20.67L x 16.16W x 3.74H			
Weight	20 lbs.	20 lbs.	20 lbs.	20 lbs.
Packaged weight	23 lbs.	23 lbs.	23 lbs.	23 lbs.
North American Cord length & plug	6 Ft. NEMA 5 -15P	6 Ft. NEMA 6 -20P	6 Ft. NEMA 6 -20P	6 Ft. NEMA 6 -20P
Warranty	One year limited warranty	One year limited warranty	One year limited warranty	One year limited warranty
Cooling clearance	2" for front, sides & rear. 9" from bottom	2" for front, sides & rear. 9" from bottom	2" for front, sides & rear. 9" from bottom	2" for front, sides & Rear. 9" from bottom

* Requires 70 CFM of free airflow * Ambient air should not exceed 104°F * Dedicated circuit required

Accessories

SPCG01	SmartTag™ Petite Chafer, Glass Lid	1.19 gal, ~11.75 in diameter by 2.5 in depth	RDSSI02	Round Divided Stainless Steel Insert, Large (1/2)
SPCM01	SmartTag™ Petite Chafer, Metal Lid	1.19 Liter, ~11.75 in diameter by 2.5 in depth	RSSILO1	Round Stainless Steel Insert, Large, (1/1)
SCG01	SmartTag™ Large Chafer, Glass Lid	1.72 gal, ~14 in diameter by 2.5 in depth	RSSIM01	Round Stainless Steel Insert, Medium, (1/1)
SCM01	SmartTag™ Large Chafer, Metal Lid	1.72 gal, ~14 in diameter by 2.5 in depth		
RPO01	Round Petite Porcelain Insert (1/1)			
RPI01	Round Porcelain Insert (1/1)			
RPI02	Round Porcelain Insert (1/2)			

Note: Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. It's CookTek's policy to continually improve its products, and we reserve the right to change or improve our specifications without notification.

CookTek

810 West Washington Blvd.
Chicago, Illinois 60607 USA
www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220

Toll Free: 1.888.COOKTEK (266-5835)

Toll Free Fax: 1.888.COOKFAX (266-5329)



MADE IN THE USA