

PRODUCT:

QTY:

ITEM#



### Specifications:

Shall be a CookTek drop-in induction cooktop, Model \_\_\_\_\_ with a total kW rating of \_\_\_\_\_. Unit shall be manufactured in the United States and constructed with a stainless steel edging and aluminum control box. Unit shall be equipped with a built-in SmarTemp<sup>TM</sup> micro-processor that performs precise temperature control, auto shut-off to prevent over-heating, self-diagnostics, and a pan maximizer feature that ensures maximum heating of induction compatible pan. Unit shall have an adjustable electronic control with 20 power cook settings and 27 precise temperature settings. Unit shall have a LED display located underneath the smooth top for precise user feedback. Unit shall operate on \_\_\_\_\_ volts \_\_\_\_\_ amps.

### Standard Features:

- Drop-in countertop design with stainless steel edging, aluminum housing and control box, heavy duty electronic components, and high impact, thick, ceramic-glass top engineered for use in commercial kitchens
- Control knob for ease of use and automatic power or temperature control
- SmarTemp<sup>TM</sup> Temperature control allows for specific temperature settings and 20 power cook settings
- Pan Maximizer feature achieves maximum heating rate of any induction compatible pan
- Drop-in cooktops and control boxes engineered and manufactured for easy installation
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Cooktop shuts off and displays error codes enabling user to diagnose and fix minor problems
- LED display for precise user feedback
- Automatic pan detection allows for instant energy transmission to pan, and no energy use when pan is not present
- Automatic shut-off feature prohibits overheating
- Easy-to-clean, smooth, ceramic-glass top surface
- Integral cooling fan keeps internal electronics cool
- Available in 1800 Watts (100-120V), 2500, 3000 and 3500 Watts (200-240V)
- One year limited warranty
- Made in the USA


Note: Induction cooking requires the use of magnetic pots and pans.



**CookTek®**  
MagnaWave® Systems

**D R O P - I N S I N G L E H O B C O O K T O P**  
**MCD-1800, MCD-2500, MCD-3000, MCD-3500**

**D R O P - I N S I N G L E H O B C O O K T O P**  
MCD-1800, MCD-2500, MCD-3000, MCD-3500

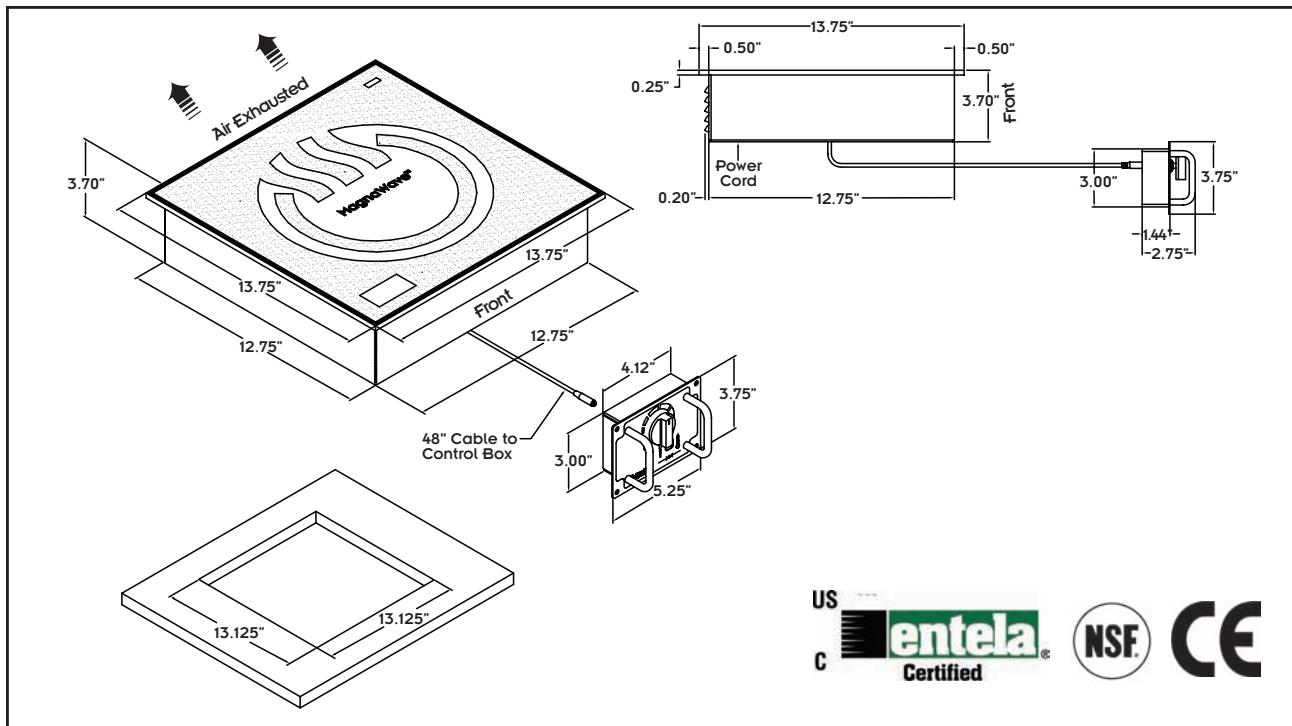

US  
entela  
Certified



**SPECIFICATIONS:**

	<b>MCD-1800</b>	<b>MCD-2500</b>	<b>MCD-3000</b>	<b>MCD-3500</b>
Power requirements	100-120V, 1PH	200-240V, 1PH	200-240V, 1PH	200-240V, 1 PH
Power consumption	1800 Watts	2500 Watts	3000 Watts	3500 Watts
BTU comparison	16,000 BTU	22,000 BTU	26,000 BTU	31,000 BTU
Voltage	100-120V 50/60Hz	200-240V 50/60Hz	200-240V 50/60Hz	200-240V 50/60Hz
Amperage	15 amps (at max. setting)	11 amps (at max. setting)	13 amps (at max. setting)	15 amps (at max. setting)
Power range	100-1800W	100-2500W	100-3000W	100-3500W
Temperature range	85 - 500F	85 - 500F	85 - 500F	85 - 500F
Surface dimensions (in)	13.75L x 13.75W x 3.7H	13.75L x 13.75W x 3.7H	13.75L x 13.75W x 3.7H	13.75L x 13.75W x 3.7H
Weight Packaged weight	15 lbs 18 lbs	15 lbs 18 lbs	15 lbs 18 lbs	15 lbs 18 lbs
Packaging (inches) dimensions	19.0L x 19.0W x 14.5H	19.0L x 19.0W x 14.5H	19.0L x 19.0W x 14.5H	19.0L x 19.0W x 14.5H
North American Cord length & plug*	6 Ft., NEMA 5-15P	6 Ft., NEMA 6-20P	6 Ft., NEMA 6-20P	6 Ft., NEMA 6-20P
Control box lead length	40 inches	40 inches	40 inches	40 inches
Warranty	One year limited warranty	One year limited warranty	One year limited warranty	One year limited warranty
Cooling clearance	2" at rear 6" from bottom	2" at rear 6" from bottom	2" at sides and rear 6" from bottom	2" at sides and rear 6" from bottom
Max. counter thickness	1in	1in	1in	1in

\*IEC Connector for 200V and higher units. International cord length = 8.2ft.

Note: Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. It's CookTek's policy to continually improve its products, and we reserve the right to change or improve our specifications without notification.

**CookTek**  
MagnaWave® Systems



**CookTek**

810 West Washington Blvd.  
Chicago, Illinois 60607 USA  
[www.cooktek.com](http://www.cooktek.com)

Tel: 1.312.563.9600 Fax: 1.312.432.6220

Toll Free: 1.888.COOKTEK (266-5835)

Toll Free Fax: 1.888.COOKFAX (266-5329)



MADE IN THE USA