



Product Name	650 Watt Drop-In Induction Buffet	Quantity	Item #
	  	 <p>Note: Induction buffet units require the use of induction compatible (i.e. magnetic) cookware.</p> <p>Magneeto 1 shown, not included with unit purchase</p> <p>  </p>	

Standard Features

- Drop-in counter-top design, aluminum housing, heavy duty energy efficient electronics, high-impact commercial grade tempered glass
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Buffet unit shuts off and displays error codes enabling user to diagnose and correct minor problems
- Automatic pan detection allows for instant energy transmission to pan, and almost no energy consumption when pan is not present
- Maximum temperature limit prevents damage to chafing dishes and food spoilage and keeps operations within ventilation code
- Precise wireless temperature control. **Units must be used with an induction compatible chafing dish fitted with CookTek® Magneeto™, or CookTek® RFID tagged chafing dishes**
- Four standard temperature settings
- Eleven additional temperature settings can be accessed via simple keypad function
- Magneeto™ devices can be programmed from the unit enabling automatic temperature control
- Standard Cat 5e or Cat 6 patch cable from unit to control box is included (MUST BE SHIELDED).
- Easy to clean tempered glass top
- Lock feature prevents unwanted setting changes
- Red LED display for precise user control and feedback

- Available in 650 watts (200-240VAC) - can use five units on one 15 amp circuit
- One year limited warranty
- Made in the USA


Specifications

Shall be a CookTek drop-in Induction Buffet unit, model _____ with a total kW rating of 0.65kW.

Unit shall be manufactured in the United States and constructed of an aluminum housing and a high-impact tempered glass top.

Unit shall be built with an auto shut-off feature to prevent overheating, offer self-diagnostics, and have a pan maximizer that ensures maximum heating of any induction compatible chafing dish.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).

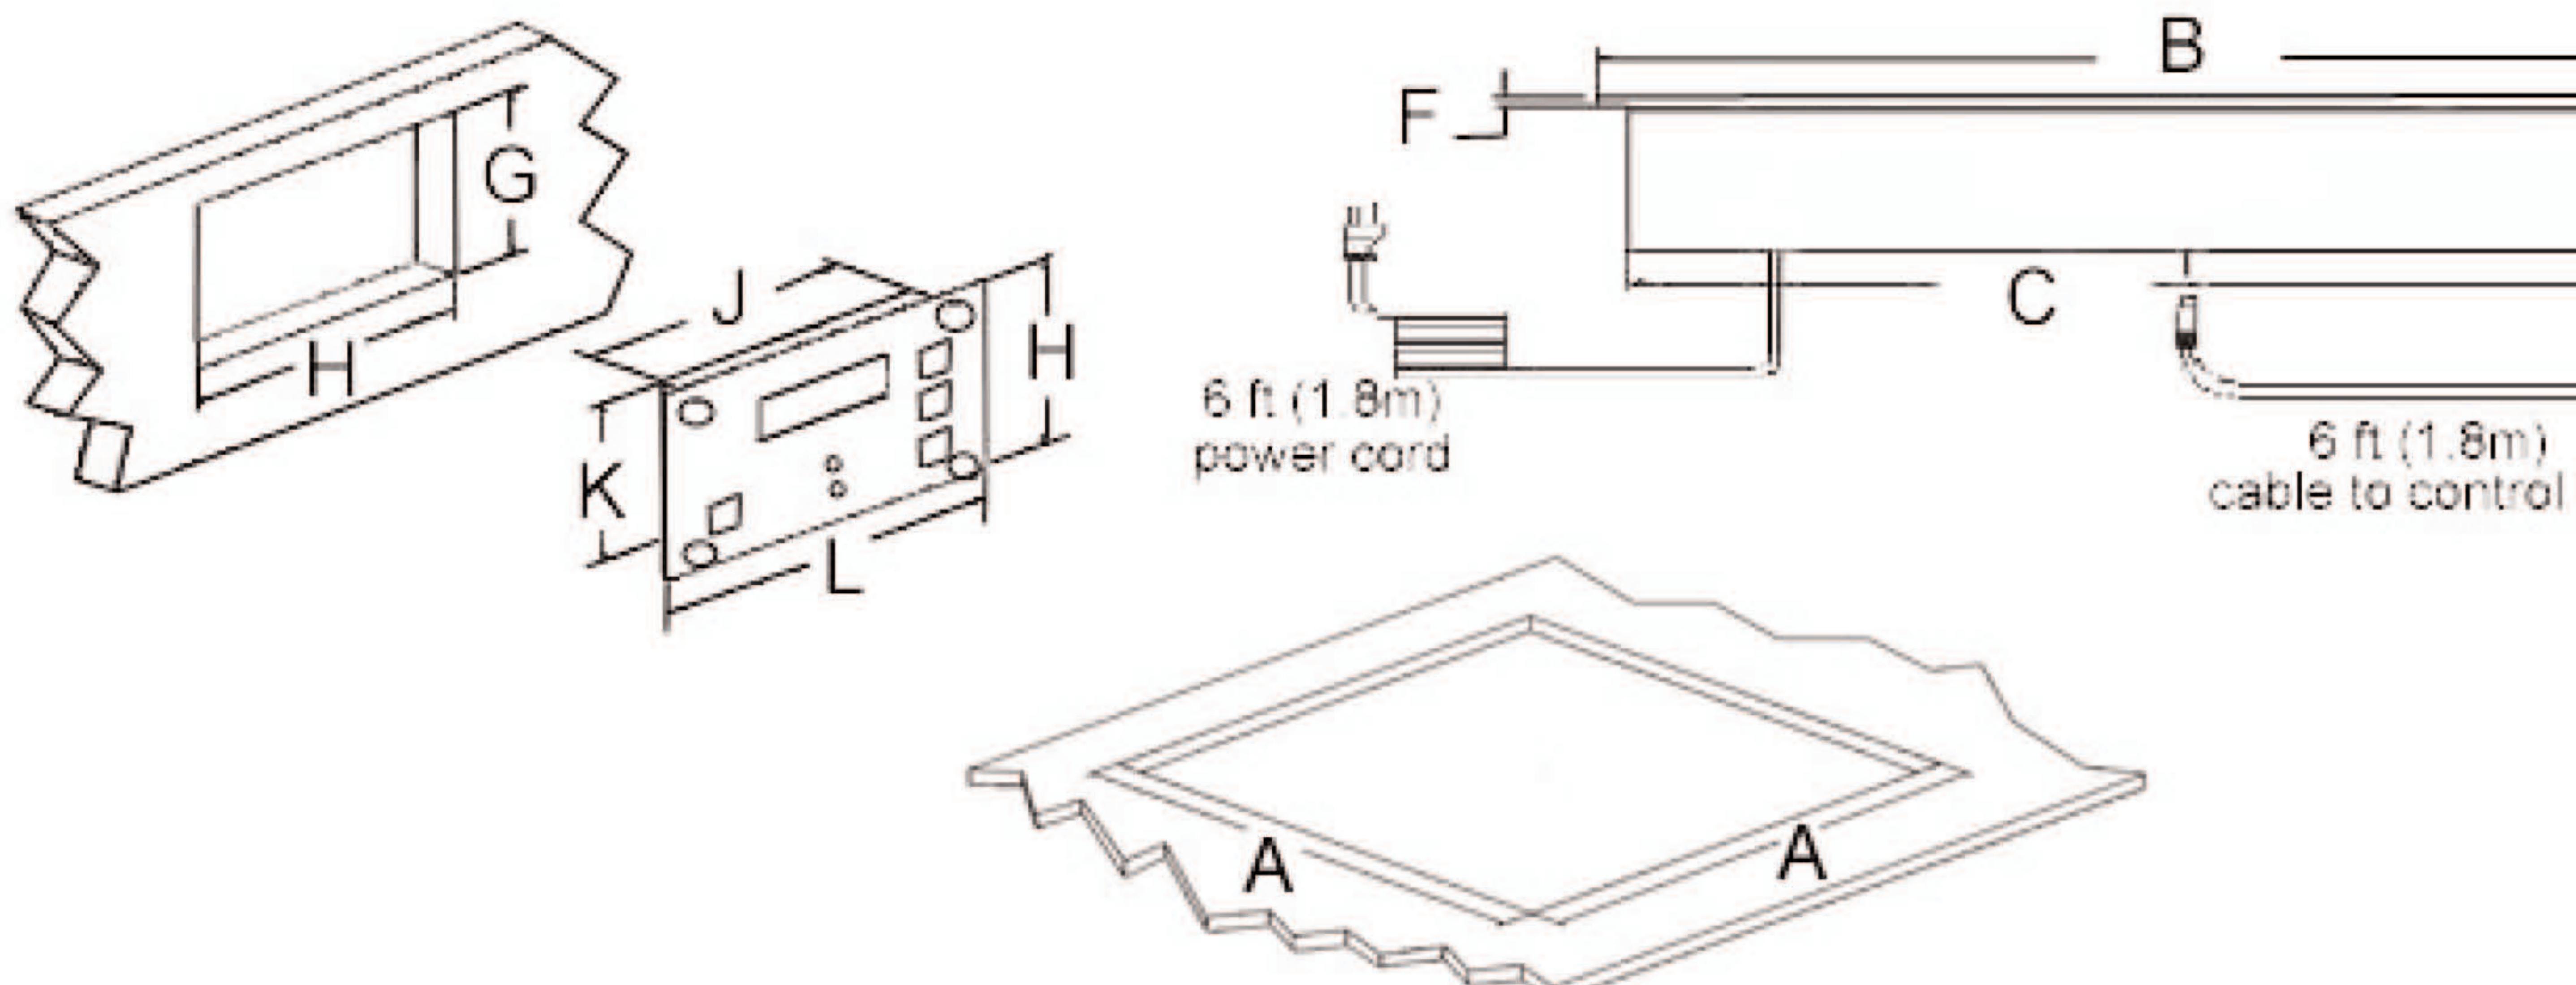

Dimensions		
	inches	mm
A	14.30	363
B	15.00	381
C	14.10	358
D	3.75	95
E	0.60	15
F	0.22	5
G	3.50	88
H	4.00	101
J	3.90	99
K	3.40	86
L	5.00	127

- Cooling clearance: 2" (55mm) for front, sides, and rear, 6" (152mm) below
- Requires 6 in² (3870mm²) of free air space within 8" (203mm) of top of cabinet, within 24" (610mm) of each unit - venting can be slots or holes as desired



Specifications

Model Number	MB062-R
Power Requirements	200-240VAC, 1Ph
Power Consumption	650W (max)
Voltage	200-240VAC, 50/60 Hz
Amperage	2.7A (max)
Power Range	100-650W
Preset Temperatures	150, 160, 175, 190°F / 65, 70, 80, 90°C
Additional Temperature Settings	80, 165, 170, 180, 185, 200, 210, 220, 230, 240, 250°F / 30, 40, 50, 60, 75, 85, 95, 100, 105, 110, 120°C
Dimensions (in)	15" x 15" x 3.75"
Dimensions (mm)	381 x 381 x 95.25
Cutout Dimensions (in)	14.3" x 14.3"
Cutout Dimensions (mm)	363 x 363
Weight	13 lbs / 5.9 kg
Packaged Weight	17 lbs / 7.7 kg
Packaged Dimensions (in)	20" x 20" x 10"
Packaged Dimensions (mm)	508 x 508 x 254
Power Cord Length	6 ft / 1.8 m
Plug Type	Country Specific
Remote Control Box Cord Length	6 ft / 1.8 m
Warranty	12 months limited parts and labor

Note: Ambient air should not exceed 50°C/122°F. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.