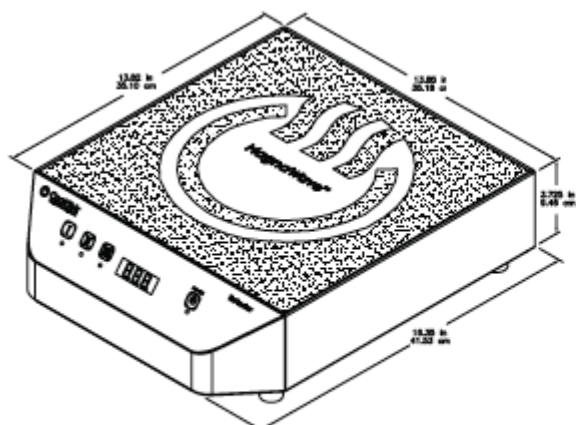


	MCF-100	MCF-200
Power requirements	100-120V, 1PH	200-240V, 1PH
Power consumption	1800 Watts	4000 Watts (at max. setting)
Voltage	100-120V 50/60Hz	200-240V 50/60Hz
Amperage	15 amps (at max. setting)	20 amps (at max. setting)
Power range	100-1800W	600W-4000W
Temperature range	85 - 500F 30 - 260C	85 - 500F 30 - 260C
Surface dimensions	16.35L x 13.85W x 4.50H 41.53L x 35.18W x 11.44H	16.35L x 13.85W x 4.50H 41.53L x 35.18W x 11.44H
Weight/ Packed weight	19 lbs / 24 lbs	19 lbs / 24 lbs
Packaging dimensions	20.75L x 18.75W x 9.0H 52.70L x 47.60W x 22.90H	20.75L x 18.75W x 9.0H 52.70L x 47.60W x 22.90H
North American Cord length & plug*	6 Ft., NEMA 5-15P	6 Ft., NEMA 6-20P
Warranty	One year limited warranty	One year limited warranty
Cooling clearance	2" (5.1 cm) front, rear and sides	2" (5.1 cm) front, rear and sides