

PRODUCT:

QTY:

ITEM#

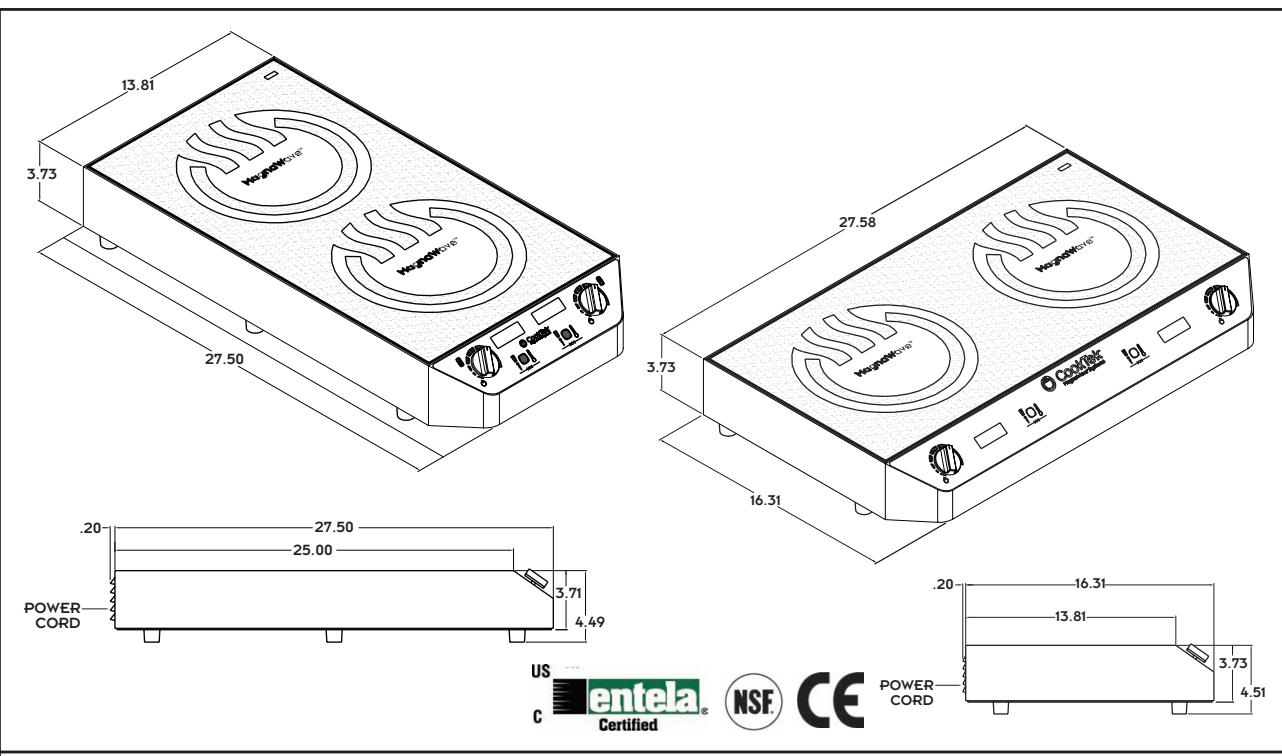


Shall be a CookTek free-standing double hob cooktop, Model \_\_\_\_\_ with a total kW rating of \_\_\_\_\_. Unit shall be manufactured in the United States and constructed of a stainless steel housing and a high impact, thick, ceramic-glass top. Unit shall be equipped with a built-in SmarTemp<sup>TM</sup> microprocessor that performs precise temperature control, auto shut-off to prevent over-heating, self-diagnostics, and a pan maximizer feature that ensures maximum heating of any induction compatible pan. Unit shall have an adjustable electronic control with 20 power cook settings and 27 precise temperature settings. Unit shall operate on \_\_\_\_\_ power with integral cord and plug supplied.

**Standard Features:**

- Portable tabletop design with stainless steel housing, heavy duty electronic components, and high impact, thick, ceramic-glass top engineered for use in commercial kitchens
- Available in front-to-back or side-by-side models
- Each induction hob has its own separate controls for independent operation and functionality
- Control knob for ease of use and automatic power or temperature control
- SmarTemp<sup>TM</sup> Temperature allows for 27 precise temperature settings and 20 power cook settings
- Pan Maximizer feature achieves maximum heating of any induction compatible pan
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Cooktop shuts off and displays error codes enabling user to diagnose and fix minor problems
- LED display for precise user feedback
- Automatic pan detection allows for instant energy transmission to pan, and no energy use when pan is not present
- Automatic shut-off feature prohibits overheating
- Sloped front panel allows for easy viewing and operation
- Easy-to-clean, smooth, ceramic-glass top surface
- Integral cooling fan keeps internal electronics cool
- Available in 5000 Watts total (200-240V) – 2500 Watts per hob
- One year limited warranty
- Made-in-the-USA

Note: Induction cooking requires the use of magnetic pots and pans.


**SPECIFICATIONS:**
**MC-2502F**
**MC-2502S**

Power requirements	200-240V, 1PH	200-240V, 1PH
Power consumption	5000 Watts (2 x 2500W at max setting)	5000 Watts (2 x 2500W at max setting)
BTU comparison	2 x 28,000 BTU	2 x 28,000 BTU
Voltage	200-240V 50/60Hz	200-240V 50/60Hz
Amperage	24 amps (at max setting)	24 amps (at max setting)
Power range	100 - 2500W per hob	100 - 2500W per hob
Temperature range	85 - 500F 30 - 260C	85 - 500F 30 - 260C
Dimensions (inches) (cm)	27.5L x 13.81W x 4.49H 69.85L x 35.08W x 11.40H	16.31L x 27.58W x 4.51H 41.43L x 70.05W x 11.46H
Weight Packaged weight	25 lbs / 11.33 kg 40 lbs / 18.14 kg	25 lbs / 11.33 kg 40 lbs / 18.14 kg
North American Cord length & plug*	6 Ft., NEMA 6-30P	6 Ft., NEMA 6-30P
Warranty	One year limited warranty	One year limited warranty
Cooling clearance	2" (5.1cm) for front, sides and rear	2" (5.1cm) for front, sides and rear

\*IEC Connector for 200V and higher units. International cord length = 2.5m (8.2ft).

Note: Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. It's CookTek's goal to continually improve its products, and we reserve the right to change or improve our specifications without notification.

