

Product Name	Counter-Top High-Power Induction Wok	Quantity		Item #	
--------------	--------------------------------------	----------	--	--------	--



Boil a cup of room temperature water in about eight seconds!

Note: Induction cooking requires the use of induction compatible (i.e. magnetic) pots and pans.



Standard Features

- Portable counter-top design with stainless steel housing, heavy duty electronic components, and specifically engineered, high-impact, high-temperature recessed glass-ceramic wok bowl designed for use in commercial kitchens
- Pan Maximizer feature and an induction coil that surrounds glass-ceramic bowl to maximize heating of an induction compatible wok pan
- Control knob with 20 precise power cook settings
- Sloped front panel allows for easy viewing and operation
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Wok unit shuts off and displays error codes enabling user to diagnose and correct minor problems
- LED display for precise user feedback
- Automatic pan detection allows for instant energy transmission to pan, and almost no energy consumption when pan is not present
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle to ensure cleaner and cooler air intake
- Easy to clean surface
- Available in 200-240VAC 3 Phase, or 400VAC 3 Phase
- 14" stainless steel induction compatible wok pan available as an accessory

- One year limited warranty
- Made in the USA



Specifications

Shall be a CookTek counter-top high-power induction wok, model _____ with a total kW rating of _____.

Unit shall be manufactured in the United States and constructed of a stainless steel housing with a specifically engineered, high-impact, high-temperature recessed glass-ceramic wok bowl to accommodate wok pans.

Unit shall be equipped with an auto shut-off feature to prevent overheating, self-diagnostics, and a pan maximizer feature to ensure maximum heating of any induction compatible wok pan.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).

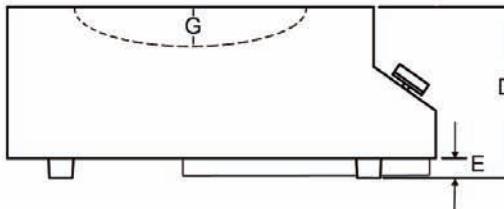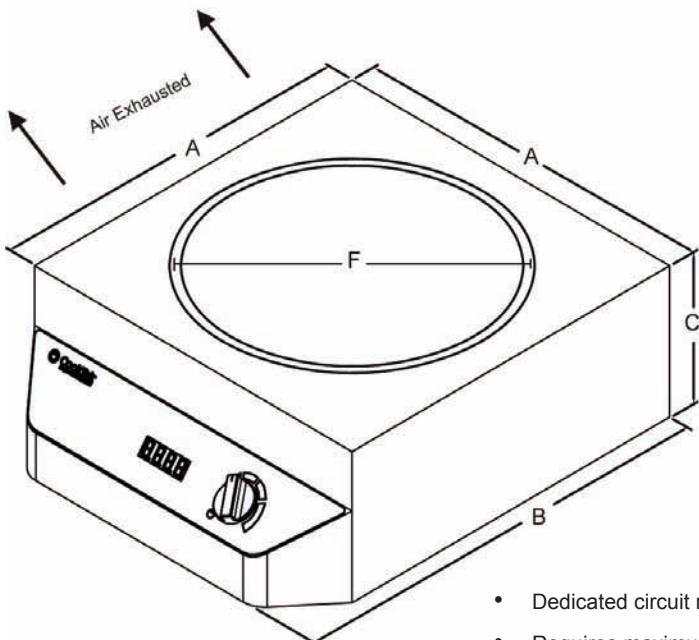

Dimensions		
	inches	mm
A	14.75	374
B	17.25	438
C	6.09	154
D	7.33	186
E	1.25	31
F	11.75	298
G	2.00	50

- Dedicated circuit required
- Requires maximum (do not exceed) ambient temperature of 50°C/122°F
- Cooling clearance: 2" (55mm) for front, sides, and rear



Specifications

Model Number	MWG5000-200	MWG5000-400
Power Requirements	200-240VAC, 3Ph 4 wire	400VAC, 3Ph
Power Consumption	5000W (max)	5000W (max)
BTU Comparison	44,000 BTU	44,000 BTU
Voltage	200-240VAC 50/60 Hz	400VAC, 50/60 Hz
Amperage	13.6A (max)	7.2A (max)
Power Range	100-5000W	100-5000W
Temperature Range	85-500°F / 30-260°C	85-500°F / 30-260°C
Dimensions (in)	14.75" x 17.25" x 7.33"	14.75" x 17.25" x 7.33"
Dimensions (mm)	374 x 438 x 186	374 x 438 x 186
Weight	22 lbs / 10 kg	22 lbs / 10 kg
Packaged Weight	27 lbs / 12.2 kg	27 lbs / 12.2 kg
Packaged Dimensions (in)	24" x 23" x 13"	24" x 23" x 13"
Packaged Dimensions (mm)	609 x 584 x 330	609 x 584 x 330
Power Cord Length	6 ft / 1.8 m	6 ft / 1.8 m
Plug Type	Country Specific	Country Specific
Warranty	12 months limited parts and labor	12 months limited parts and labor

Note: Ambient air should not exceed 50°C/122°F. Dedicated circuit required. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.